

SPECIFICATION

PYROELECTRIC PASSIVE
INFRARED SENSOR

MODEL PMS11-P

TYPE: PMS11-P

PAGE: 1 /6

CHART:

EDITION: A

ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD

TYPE OF SENSOR

SINGLE ELEMENT

PHYSICAL CONFIGURATION

- | | |
|------------------------|--------------------------------|
| (1) PACKAGE | TO-5 METAL CAN
SEE FIGURE A |
| (2) ELEMENT SIZE | Φ 1.8 mm |
| (3) LEAD CONFIGURATION | SEE FIGURE B,C |

ELECTRICAL CHARACTERISTICS (AT 25±5°C)

- | | |
|---------------------------|---|
| (1) CIRCUIT CONFIGURATION | SEE FIGURE D |
| (2) OPERATION VOLTAGE | 2.2~15 V DC (Drain-Ground)
(Rs: 47K Ω) |
| (3) SOURCE VOLTAGE | 0.4~1.1 V (V _D =10V, Rs=47K Ω) |
| (4) SIGNAL OUTPUT | Min 2.0 V _{p-p} (Source-Ground)
(FIRE TEMPERATURE
CHOPPER FREQUENCY 1Hz:
MEASUREMENT AMP. 0.3~3.0Hz、
72.5db(AT 1Hz))
SEE FIGURE F |

TYPE: PMS11-P

PAGE: 2 /6

CHART:

EDITION: A

ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD

OPTICAL CHARACTERISTICS

- (1) FIELD OF VIEW 88 °
SEE FIGURE G
- (2) WINDOW MATERIAL White Gem
Wave Length_{p-p} 4.35 μ m
Half Width 180nm
Thickness 0.39 mm

ENVIRONMENTAL REQUIREMENTS

- (1) OPERATING TEMPERATURE - 20 ~ + 50 °C
(2) STORAGE TEMPERATURE - 30 ~ + 60 °C

APPLICATION

FIRE DETECTION

※ NOTES

1. DESIGN RESTRICTIONS/PRECAUTIONS

FOR OUTDOOR APPLICATIONS , BE SURE TO APPLY SUITABLE SUPPLEMENTARY OPTICAL FILTER AND DRIP-PROOF . ANTI-DEW CONSTRUCTION. THIS SENSOR IS DESIGNED FOR INDOOR USE. IN CASES WHERE SECONDRAY ACCIDENTS DEE TO OPERATION FAILURE OR MALFUNCTIONS CAN BE ANTICIPATED. ADD A FAIL SAFE FUNCTION TO THE DESIGN.

2. USAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL, FAILURE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT USE THIS SENSOR IN FOLLOWING, OR SIMILAR, CONDITIONS.

- A. IN RAPID ENVIRONMENTAL TEMPERATURE CHANGES.
- B. IN STRONG SHOCK OR VIBRATION.
- C. IN A PLACE WHERE THERE ARE OBSTRUCTING MATERIALS (GLASS.FOGETC) THROUGH WHICH INFRARED RAYS CANNOT PASS WITHIN DETECTION AREA.
- D. IN FLUID. CORROSIVE GASES AND SEA BREEZE.

TYPE: PMS11-P

PAGE: 3 / 6

CHART:

EDITION: A

ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD

- E. CONTINUAL USE IN HIGH HUMIDITY ATMOSPHERE.
- F. EXPOSED TO DIRECT SUN LIGHT OR HEADLIGHTS OF AUTOMOBILES.
- G. EXPOSED TO DIRECT WIND FROM A HEATER OR AIR CONDITIONS.

3. ASSEMBLY RESTRICTIONS/PRECAUTIONS

SOLDERING-----

- A. USE SOLDERING IRONS WHEN SOLDERING.
- B. AVOID KEEPING PINS OF THIS HOT FOR A LONG TIME AS EXCESSIVE HEAT MAY CAUSE DETERIORATION OF ITS QUALITY.(E.G. WITHIN 5 SEC. AT 350°C)
- C. AVOID STATIC ELECTRICITY OR STRONG ELECTROMAGNETIC WAVES.

WASHING-----

- A. BE SURE TO WASH OUT ALL FLUX AFTER SOLDERING AS REMAINDER MAY CAUSE MALFUNCTIONS.
- B. USE A BRUSH WHEN WASHING. WASHING WITH AN ULTRASONIC CLEANER MAY CAUSE OPERATIONAL FAILURE.



4. HANDLING AND STORAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE, APPEARANCE DAMAGE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT EXPOSE THIS SENSOR TO THE FOLLOWING OR SIMILAR, HANDLING AND STORAGE CONDITIONS.

- A. VIBRATION FOR A LONG TIME.
- B. STRONG SHOCK.
- C. STATIC ELECTRICITY OR STRONG ELECTROMAGNETIC WAVES.
- D. HIGH TEMPERATURE AND HUMIDITY FOR A LONG TIME.
- E. CORROSIVE GASES OR SEA BREEZE.
- F. DIRTY AND DUSTY ENVIRONMENTS THAT MAY CONTAMINATE THE OPTICAL WINDOWS.

SENSOR TROUBLES RESULTING FROM MISUSE. INAPPROPRIATE HANDLING OR STORAGE ARE NOT THE MANUFACTURER ' S RESPONSIBILITY.

TYPE: PMS11-P	PAGE: 4 /6	CHART:	EDITION: A
ASSEMBLY:	SHANGHAI NICERA SENSOR CO.,LTD		

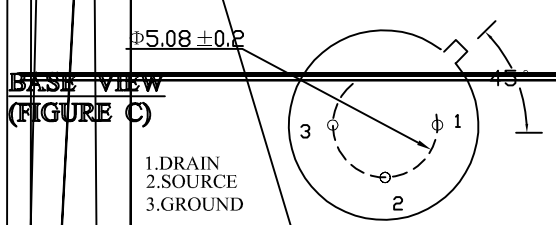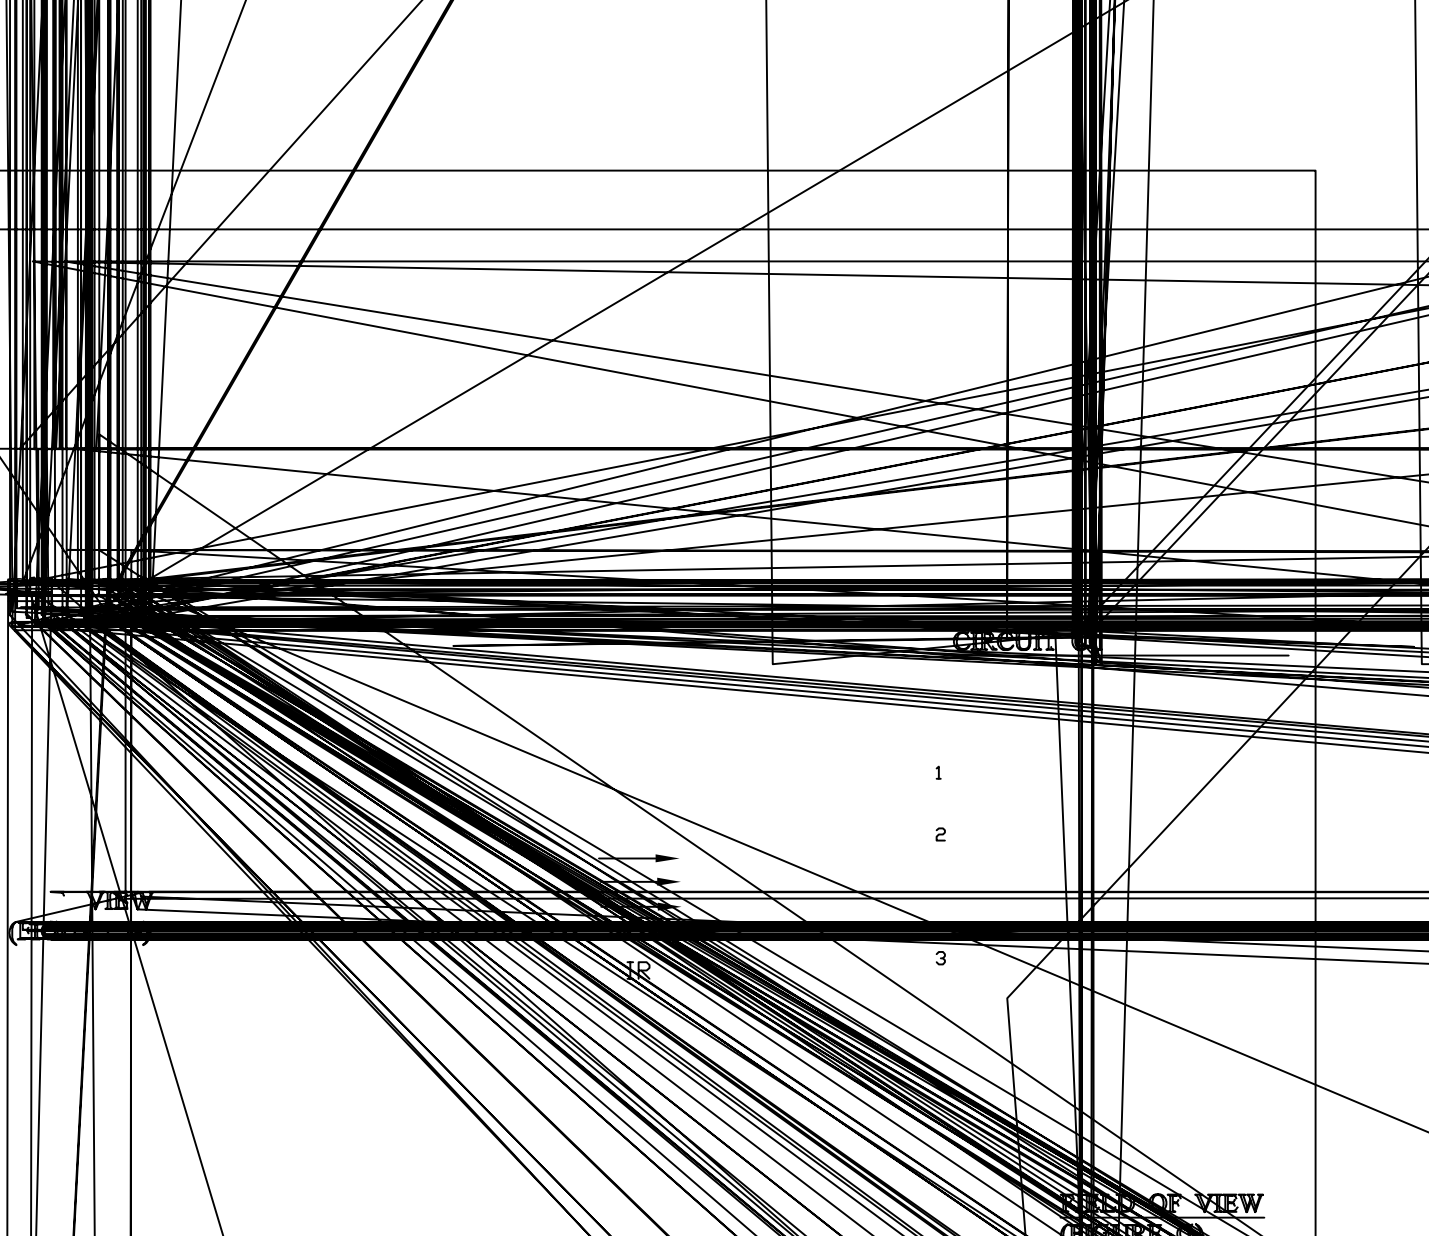

**BASE VIEW
(FIGURE C)**


- 1.DRAIN
- 2.SOURCE
- 3.GROUND

TYPE: PMS11-P PAGE: 5/6 CHART: EDITION: A


ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD

TEST DIAGRAM
(FIGURE E)

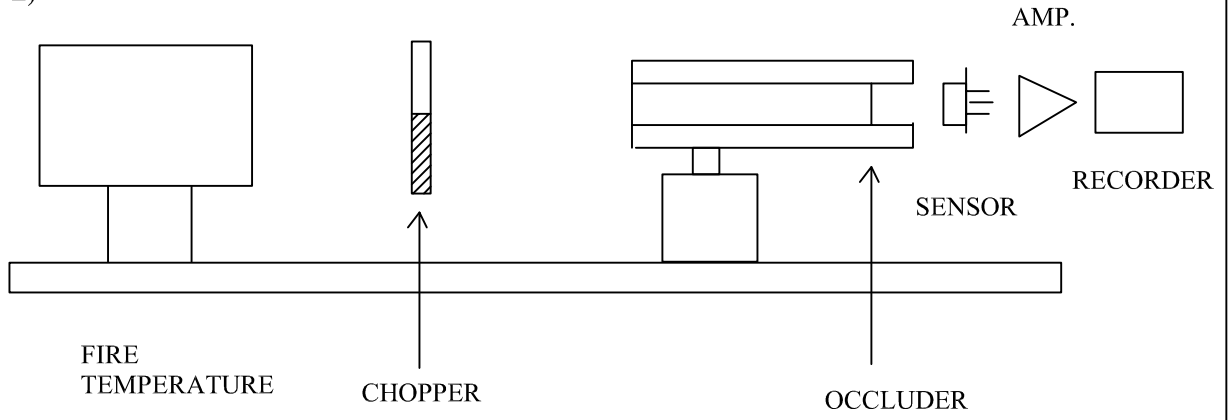

OCCLUDER POSITION



SIGNAL OUTPUT
(FIGURE F)

TYPE: PMS11-P

PAGE: 6/6

CHART:

EDITION: A

ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD