

SPECIFICATION FOR APPROVAL

MODEL : NAT80A-2-P

PYROELECTRIC INFRARED SENSOR

CUSTOMER:

APPROVED BY:

DATE:

TYPE: NAT80A-2-P

PAGE: 1 /6

CHART:

EDITION: A

SHANGHAI NICERA SENSOR CO.,LTD

TYPE OF SENSOR

OMNI-DIRECTIONAL QUAD ELEMENTS

PHYSICAL CONFIGURATION

- (1) PACKAGE TO-5 METAL CAN
SEE FIGURE A
- (2) SENSITIVE AREA 1.0×1.0 mm
- (3) LEAD CONFIGURATION SEE FIGURE B,C

ELECTRICAL CHARACTERISTICS (AT 25±5°C)

- (1) CIRCUIT CONFIGURATION SEE FIGURE D
- (2) SUPPLY VOLTAGE 2.2~15 V DC (Drain-Ground)
(Rs: 47K Ω)
- (3) OFFSET VOLTAGE 0.4~1.5 V
TYP 0.7 V (V_D=10V, Rs=47K Ω)
- (4) SIGNAL OUTPUT Min 3.5 Vp-p
TYP 5.5 Vp-p (Source-Ground)
(BLACK BODY 420K; CHOPPER
FREQUENCY 1Hz: MEASUREMENT
AMP. 0.3~3.0Hz、 72.5db(AT 1Hz))
SEE FIGURE F
- (5) SENSITIVITY 420K, 1Hz 4860 V/W
- (6) DETECTIVITY (420K,1Hz,1Hz) 1.7×10^8 cmHz^{1/2}/W
- (7) BALANCE OUTPUT Max 15% (Source-Ground)
(BLACK BODY 420K; CHOPPER
FREQUENCY 1Hz: MEASUREMENT
AMP. 0.3~3.0Hz、 72.5db(AT 1Hz))
SEE FIGURE G
|SA-SB|/|SA+SB|

TYPE: NAT80A-2-P

PAGE: 2/6

CHART:

EDITION: A

SHANGHAI NICERA SENSOR CO.,LTD

NOISE OUTPUT	Max 200mV
	TYP 100 mV (Source-Ground) (MEASUREMENT AMP. 0.3~3.0Hz、 72.5db(AT 1Hz))
	SEE FIGURE H
(9) NEP (420K,1Hz,1Hz)	8.7×10^{-10} W

OPTICAL CHARACTERISTICS

(1) FIELD OF VIEW	XY 132°×132° ; 45° 146° SEE FIGURE I
(2) SPECTRAL RESPONSE	Si Filter Cuton WL $5.0 \pm 0.5 \mu m$ Thickness 0.5mm Average T>80% Pass Band 6.0~14 μm

ENVIRONMENTAL REQUIREMENTS

(1) OPERATING TEMPERATURE -30~+70 °C
(2) STORAGE TEMPERATURE -40~+80 °C

※ **NOTES**

1. DESIGN RESTRICTIONS/PRECAUTIONS

FOR OUTDOOR APPLICATIONS , BE SURE TO APPLY SUITABLE SUPPLEMENTARY OPTICAL FILTER AND DRIP-PROOF。 ANTI-DEW CONSTRUCTION。 THIS SENSOR IS DESIGNED FOR INDOOR USE。 IN CASES WHERE SECONDRAY ACCIDENTS DEE TO OPERATION FAILURE OR MALFUNCTIONS CAN BE ANTICIPATED。 ADD A FAIL SAFE FUNCTION TO THE DESIGN。

2. USAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL, FAILURE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT USE THIS SENSOR IN FOLLOWING, OR SIMILAR, CONDITIONS.

TYPE: NAT80A-2-P	PAGE: 3 / 6	CHART:	EDITION: A
SHANGHAI NICERA SENSOR CO.,LTD			

- A. IN RAPID ENVIRONMENTAL TEMPERATURE CHANGES.
- B. IN STRONG SHOCK OR VIBRATION. CUSTOMERS TO USE FALL PROTECTION, CERAMIC CHIP FRAGILE.
- C. IN A PLACE WHERE THERE ARE OBSTRUCTING MATERIALS (GLASS.FOG.ETC) THROUGH WHICH INFRARED RAYS CANNOT PASS WITHIN DETECTION AREA.
- D. IN FLUID. CORROSIVE GASES AND SEA BREEZE.
- E. CONTINUAL USE IN HIGH HUMIDITY ATMOSPHERE.
- F. EXPOSED TO DIRECT SUN LIGHT OR HEADLIGHTS OF AUTOMOBILES.
- G. EXPOSED TO DIRECT WIND FROM A HEATER OR AIR CONDITIONS.
- H. PRODUCTION PROCESS, NOT THE ACCUMULATION OF STACKED PCB BOARD,THE FILTER IS EASILY DAMAGED.

3. ASSEMBLY RESTRICTIONS/PRECAUTIONS

SOLDERING-----

- A. USE SOLDERING IRONS WHEN SOLDERING.
- B. AVOID KEEPING PINS OF THIS HOT FOR A LONG TIME AS EXCESSIVE HEAT MAY CAUSE DETERIORATION OF ITS QUALITY.(E.G. WITHIN 5 SEC. AT 350°C)
- C. AVOID STATIC ELECTRICITYOR STRONG ELECTROMAGNETIC WAVES. RECOMMENDED TO WEAR A SHIELD RING.

WASHING-----

- A. BE SURE TO WASH OUT ALL FLUX AFTER SOLDERING AS RENAINDER MAY CAUSE MALFUNCTIONS.
- B. USE A BRUSH WHEN WASHING.WASHING WITH AN ULTRASONIC CLEANER MAY CAUSE OPERATIONAL FAILURE.

4.HANDLING AND STORAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE. APPEARANCE DAMAGE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT EXPOSE THIS SENSOR TO THE FOLLOWING OR SIMILAR, HANDLING AND STORAGE CONDITIONS.

- A. VIBRATION FOR A LONG TIME.
- B. STRONG SHOCK.
- C. STATIC ELECTRICITYOR STRONG ELECTROMAGNETIC WAVES.
- D. HIGH TEMPERATURE AND HUMIDITY FOR A LONG TIME.
- E. CORROSIVE GASES OR SEA BREEZE.
- F. DIRTY AND DUSTY ENVIRONMENTS THAT MAY CONTAMINATE THE OPTICAL WINDOWS.

SENSOR TROUBLES RESULTING FROM MISUSE. INAPPROPRIATE HANDLING OR STORAGE ARE NOT THE MANUFACTURER ' S RESPONSIBILITY.

TYPE: NAT80A-2-P

PAGE: 4 /6


CHART:

EDITION: A


SHANGHAI NICERA SENSOR CO.,LTD

TOP VIEW
(FIGURE A)


Sensor



SIDE VIEW
(FIGURE B)



BASE VIEW

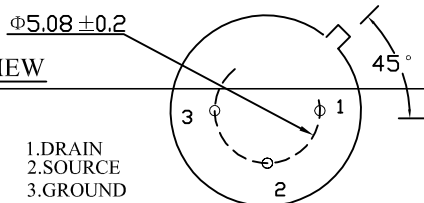

TYPE: NAT80A-2-P


PAGE: 5/6

CHART:


EDITION: A

SHANGHAI NICERA SENSOR CO.,LTD


TEST DIAGRAM
(FIGURE E)

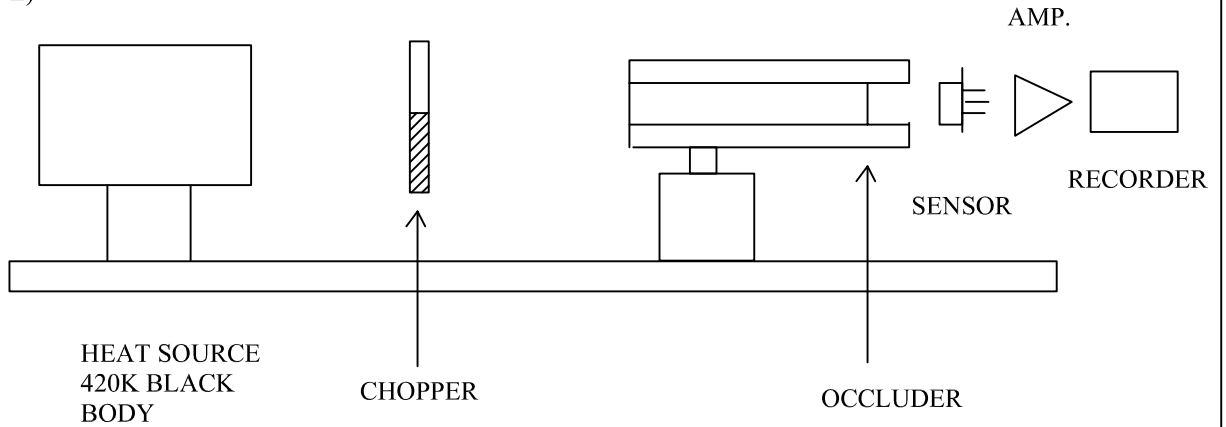


OCCLUDER POSITION



SIGNAL A OUTPUT
(FIGURE F)



SIGNAL B OUTPUT
(FIGURE G)



NOISE OUTPUT
(FIGURE H)

TYPE: NAT80A-2-P

PAGE: 6/6

CHART:

EDITION: A

SHANGHAI NICERA SENSOR CO.,LTD